


# Fiberdyne Configuration 4

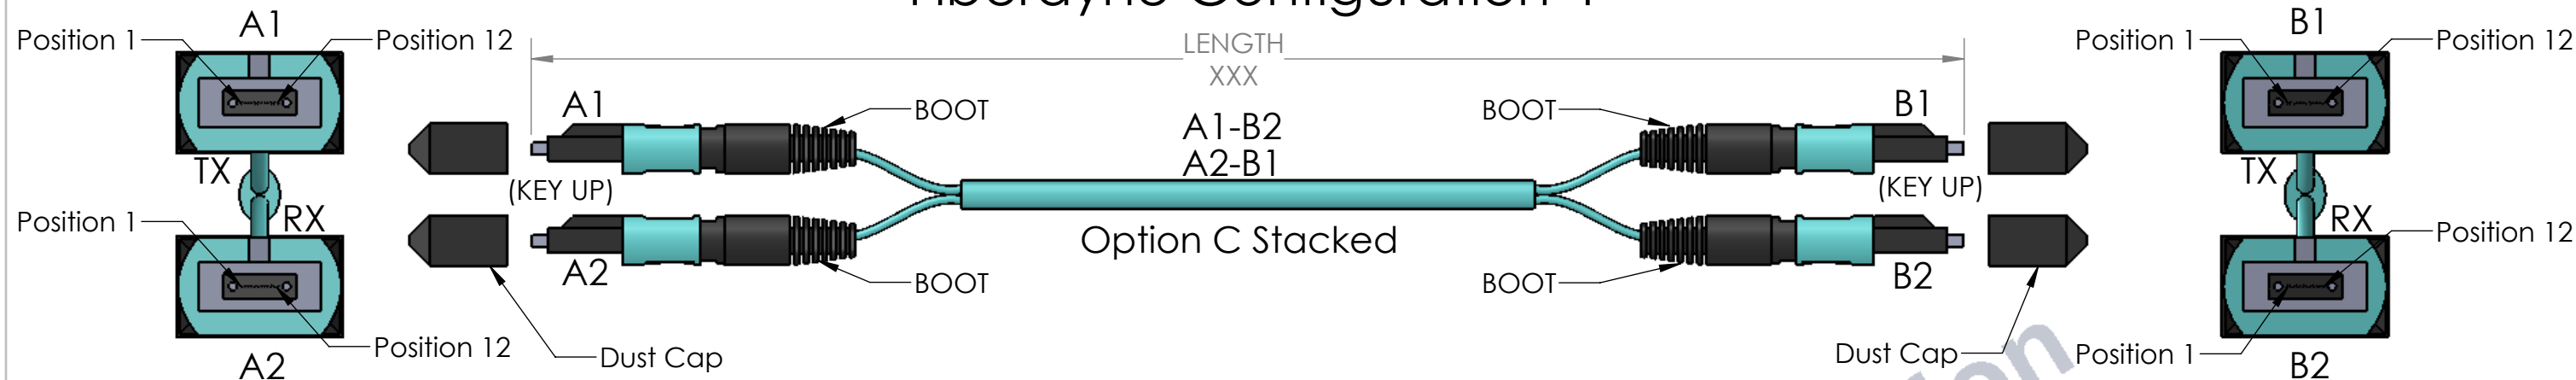

## 100Gb MPO Assemblies

Fiberdyne Part Number	Fiberdyne Configuration 4	Cable Type 50/125 OM3 (Max 100m)	Fiber Count	End A1 Connector	End A2 Connector	End B1 Connector	End B2 Connector	Guide Pin P=Pinned(Male) NP=Non-Pinned(Female)	Insertion Loss (IL) Standard / Low Loss*
FMT-004010-XXXM	100GBASE-SR10	3mm Round Plenum OM3	24	MPO 1x12	MPO 1x12	MPO 1x12	MPO 1x12	NP-NP	<.75
FMT-004020-XXXM	100GBASE-SR10	3mm Round Plenum OM3	24	MPO 1x12	MPO 1x12	MPO 1x12	MPO 1x12	NP-P	<.75
FMT-004030-XXXM	100GBASE-SR10	3mm Round Plenum OM3	24	MPO 1x12	MPO 1x12	MPO 1x12	MPO 1x12	P-NP	<.75
FMT-004040-XXXM	100GBASE-SR10	3mm Round Plenum OM3	24	MPO 1x12	MPO 1x12	MPO 1x12	MPO 1x12	P-P	<.75
FMT-004050-XXXM	100GBASE-SR10	3mm Round Plenum OM3	24	MPO 1x12	MPO 1x12	MPO 1x12	MPO 1x12	NP-NP	<.35
FMT-004060-XXXM	100GBASE-SR10	3mm Round Plenum OM3	24	MPO 1x12	MPO 1x12	MPO 1x12	MPO 1x12	NP-P	<.35
FMT-004070-XXXM	100GBASE-SR10	3mm Round Plenum OM3	24	MPO 1x12	MPO 1x12	MPO 1x12	MPO 1x12	P-NP	<.35
FMT-004080-XXXM	100GBASE-SR10	3mm Round Plenum OM3	24	MPO 1x12	MPO 1x12	MPO 1x12	MPO 1x12	P-P	<.35
Fiberdyne Part Number	Fiberdyne Configuration 4	Cable Type 50/125 OM4 (Max 150m)	Fiber Count	End A1 Connector	End A2 Connector	End B1 Connector	End B2 Connector	Guide Pin P=Pinned(Male) NP=Non-Pinned(Female)	Insertion Loss (IL) Standard / Low Loss*
FMT-004110-XXXM	100GBASE-SR10	3mm Round Plenum OM4	24	MPO 1x12	MPO 1x12	MPO 1x12	MPO 1x12	NP-NP	<.75
FMT-004120-XXXM	100GBASE-SR10	3mm Round Plenum OM4	24	MPO 1x12	MPO 1x12	MPO 1x12	MPO 1x12	NP-P	<.75
FMT-004130-XXXM	100GBASE-SR10	3mm Round Plenum OM4	24	MPO 1x12	MPO 1x12	MPO 1x12	MPO 1x12	P-NP	<.75
FMT-004140-XXXM	100GBASE-SR10	3mm Round Plenum OM4	24	MPO 1x12	MPO 1x12	MPO 1x12	MPO 1x12	P-P	<.75
FMT-004150-XXXM	100GBASE-SR10	3mm Round Plenum OM4	24	MPO 1x12	MPO 1x12	MPO 1x12	MPO 1x12	NP-NP	<.35
FMT-004160-XXXM	100GBASE-SR10	3mm Round Plenum OM4	24	MPO 1x12	MPO 1x12	MPO 1x12	MPO 1x12	NP-P	<.35
FMT-004170-XXXM	100GBASE-SR10	3mm Round Plenum OM4	24	MPO 1x12	MPO 1x12	MPO 1x12	MPO 1x12	P-NP	<.35
FMT-004180-XXXM	100GBASE-SR10	3mm Round Plenum OM4	24	MPO 1x12	MPO 1x12	MPO 1x12	MPO 1x12	P-P	<.35

\*Insertion Loss for Connector Only

## Fiberdyne Configuration 4

MPO-MPO, Two 12 Pin 10 Fiber to Two 12 Pin 10 Fiber, 100G, Option C, Key Up/Key Up					
Fiber Color	Lane Assignment Connector A	Position # Connector A1 Left Side	Position # Connector B2 Right Side	Lane Assignment Connector B	Fiber Color
Blue	Unused	1	12	Unused	Blue
Orange	RX0	2	11	TX0	Orange
Green	RX1	3	10	TX1	Green
Brown	RX2	4	9	TX2	Brown
Grey	RX3	5	8	TX3	Grey
White	RX4	6	7	TX4	White
Red	RX5	7	6	TX5	Red
Black	RX6	8	5	TX6	Black
Yellow	RX7	9	4	TX7	Yellow
Purple	RX8	10	3	TX8	Purple
Pink	RX9	11	2	TX9	Pink
Aqua	Unused	12	1	Unused	Aqua
Fiber Color	Lane Assignment Connector A	Position # Connector A2 Left Side	Position # Connector B1 Right Side	Lane Assignment Connector B	Fiber Color
Blue	Unused	1	12	Unused	Blue
Orange	TX0	2	11	RX0	Orange
Green	TX1	3	10	RX1	Green
Brown	TX2	4	9	RX2	Brown
Grey	TX3	5	8	RX3	Grey
White	TX4	6	7	RX4	White
Red	TX5	7	6	RX5	Red
Black	TX6	8	5	RX6	Black
Yellow	TX7	9	4	RX7	Yellow
Purple	TX8	10	3	RX8	Purple
Pink	TX9	11	2	RX9	Pink
Aqua	Unused	12	1	Unused	Aqua

Use Configuration 4 with Cassette Configuration 192

# RoHS

Fiberdyne Labs Inc. Frankfort, NY  
www.fiberdyne.com

PROPRIETARY AND CONFIDENTIAL  
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Fiberdyne Labs Inc. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Fiberdyne Labs Inc IS PROHIBITED.

FIBERDYNE LABS INC.  
TITLE: Fiberdyne Configuration 4  
MPO-MPO, 2x12 position, 100G  
Option C

SIZE <b>B</b>	DWG. NO. 075-11729-001	REV A
SCALE: 1:1	ECR: 14006-001	SHEET 1 OF 1