

8 7 6 5 4 3 2 1

REV.	DESCRIPTION	DATE	APPROVED
------	-------------	------	----------

D

D

C


C

B

B

A

A

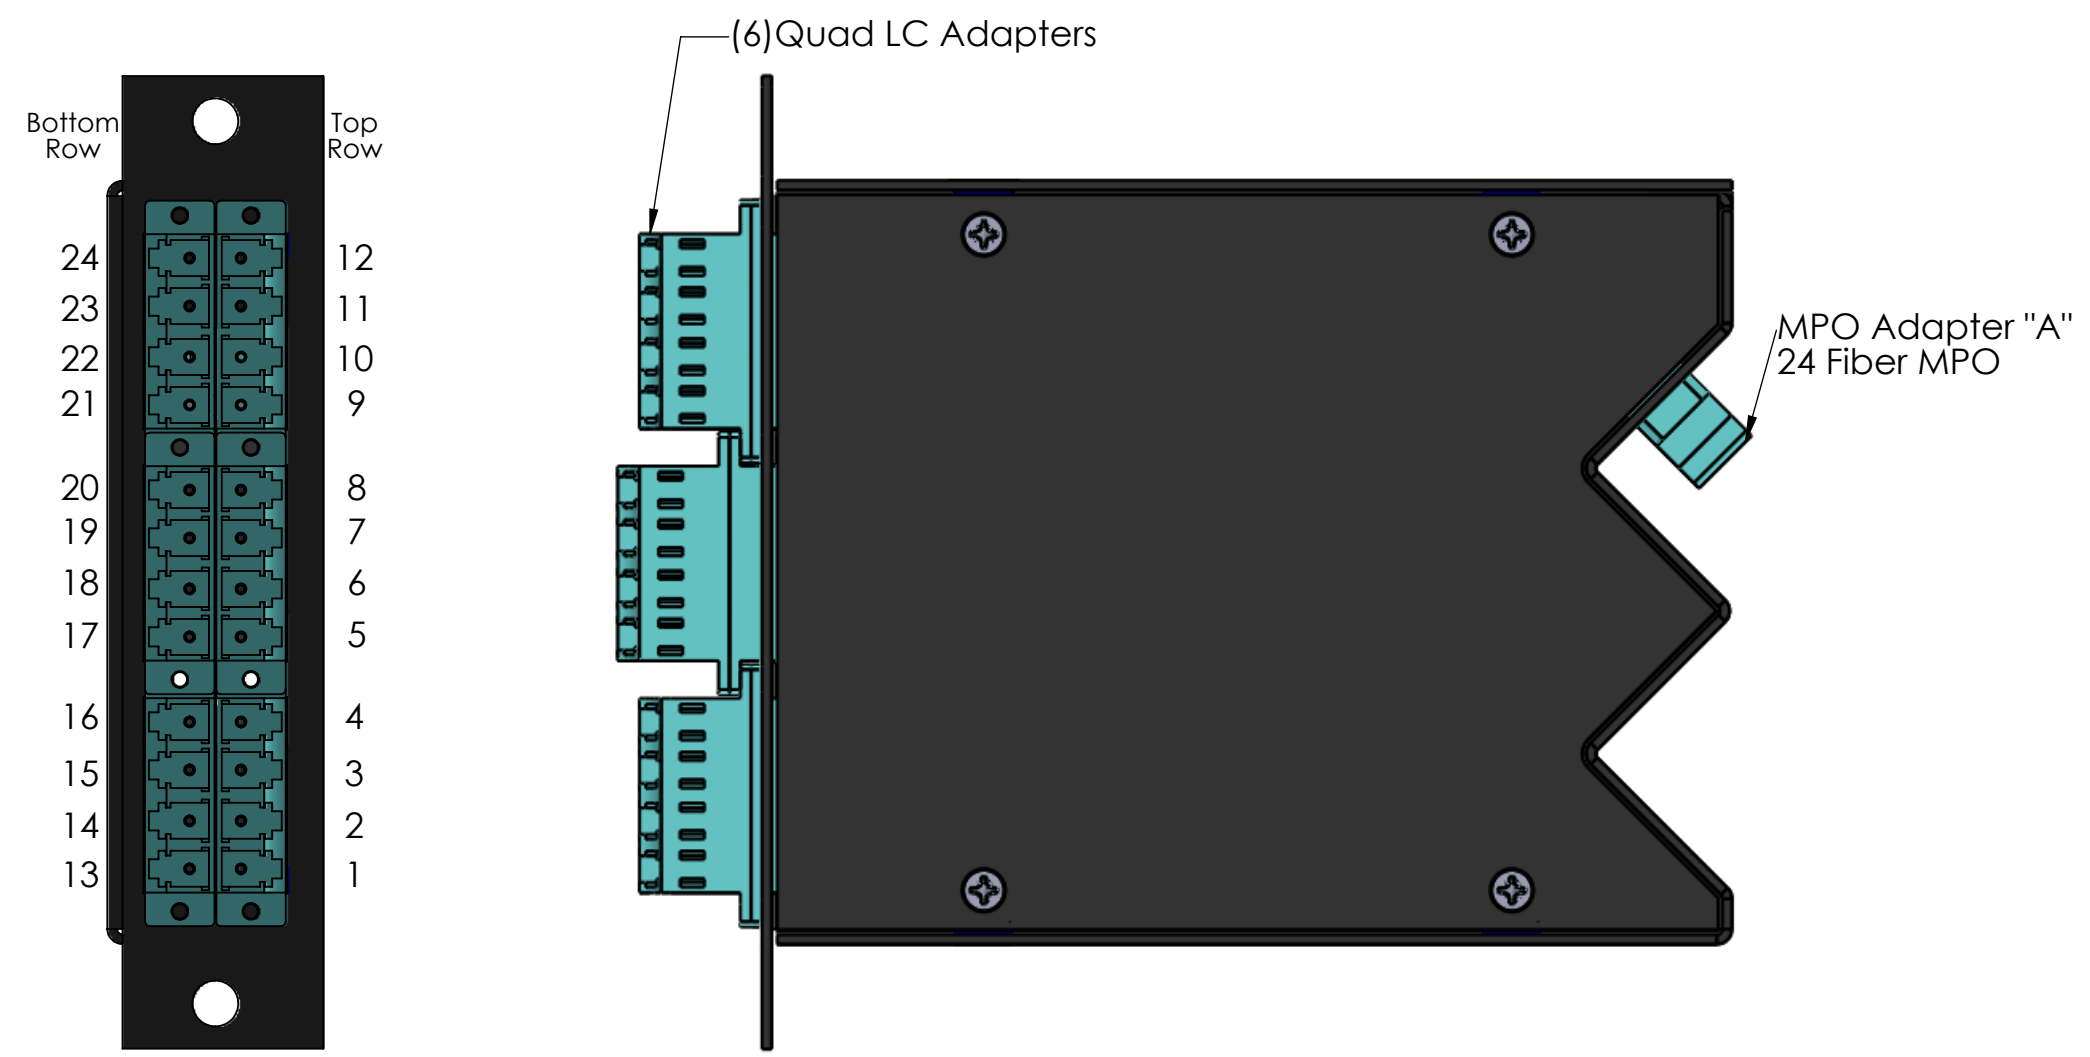

Fiberdyne Configuration 252

100G, LGX Cassette, 24 Pin 20 Fiber MPO to Twenty LCs, Option C

Fiber Color Connector A	Lane Assignment Connector A	Pin # Connector A	LC Position Bottom Row	LC Position Bottom Row	Fiber Color Bottom Row
Blue	Unused	1	24	Unused	Blue
Orange	RX0	2	23	TX0	Orange
Green	RX1	3	22	TX1	Green
Brown	RX2	4	21	TX2	Brown
Grey	RX3	5	20	TX3	Grey
White	RX4	6	19	TX4	White
Red	RX5	7	18	TX5	Red
Black	RX6	8	17	TX6	Black
Yellow	RX7	9	16	TX7	Yellow
Purple	RX8	10	15	TX8	Purple
Pink	RX9	11	2	TX9	Pink
Aqua	Unused	12	13	Unused	Aqua
Fiber Color Connector A	Lane Assignment Connector A	Pin # Connector A	LC Position Top Row	LC Position Top Row	Fiber Color Top Row
Blue	Unused	13	12	Unused	Blue
Orange	TX0	14	11	RX0	Orange
Green	TX1	15	10	RX1	Green
Brown	TX2	16	9	RX2	Brown
Grey	TX3	17	8	RX3	Grey
White	TX4	18	7	RX4	White
Red	TX5	19	6	RX5	Red
Black	TX6	20	5	RX6	Black
Yellow	TX7	21	4	RX7	Yellow
Purple	TX8	22	3	RX8	Purple
Pink	TX9	23	2	RX9	Pink
Aqua	Unused	24	1	Unused	Aqua

Fiberdyne Labs Inc. Frankfort, NY
www.fiberdyne.com

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF FIBERDYNE LABS INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF FIBERDYNE LABS INC IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME	DATE	FIBERDYNE LABS, INC TITLE: Configuration 252 LGX Cassette, 100G, 24 Pin 20 Fiber MPO to Twenty LCs Option C	
DIMENSIONS ARE IN INCHES		DRAWN	CFO		04/14/14
TOLERANCES:		CHECKED			
FRACTIONAL ±		ENG APPR.			
ANGULAR: MACH ± BEND ±		MFG APPR.			
TWO PLACE DECIMAL ±.005		Q.A.			
THREE PLACE DECIMAL ±.01		COMMENTS:			
INTERPRET GEOMETRIC TOLERANCING PER:		CAD FILE:			
MATERIAL		SIZE		DWG. NO.	
SEE NOTES		B		130-11977-001	
FINISH		REV		A	
SEE NOTES		SCALE: 1:1		ECR: 14006-001	
NEXT ASSY	USED ON	SHEET 1 OF 1			
APPLICATION	DO NOT SCALE DRAWING				

8 7 6 5 4 3 2 1