

REV.	DESCRIPTION	DATE	APPROVED

D

D

C


C

B

B

A

A

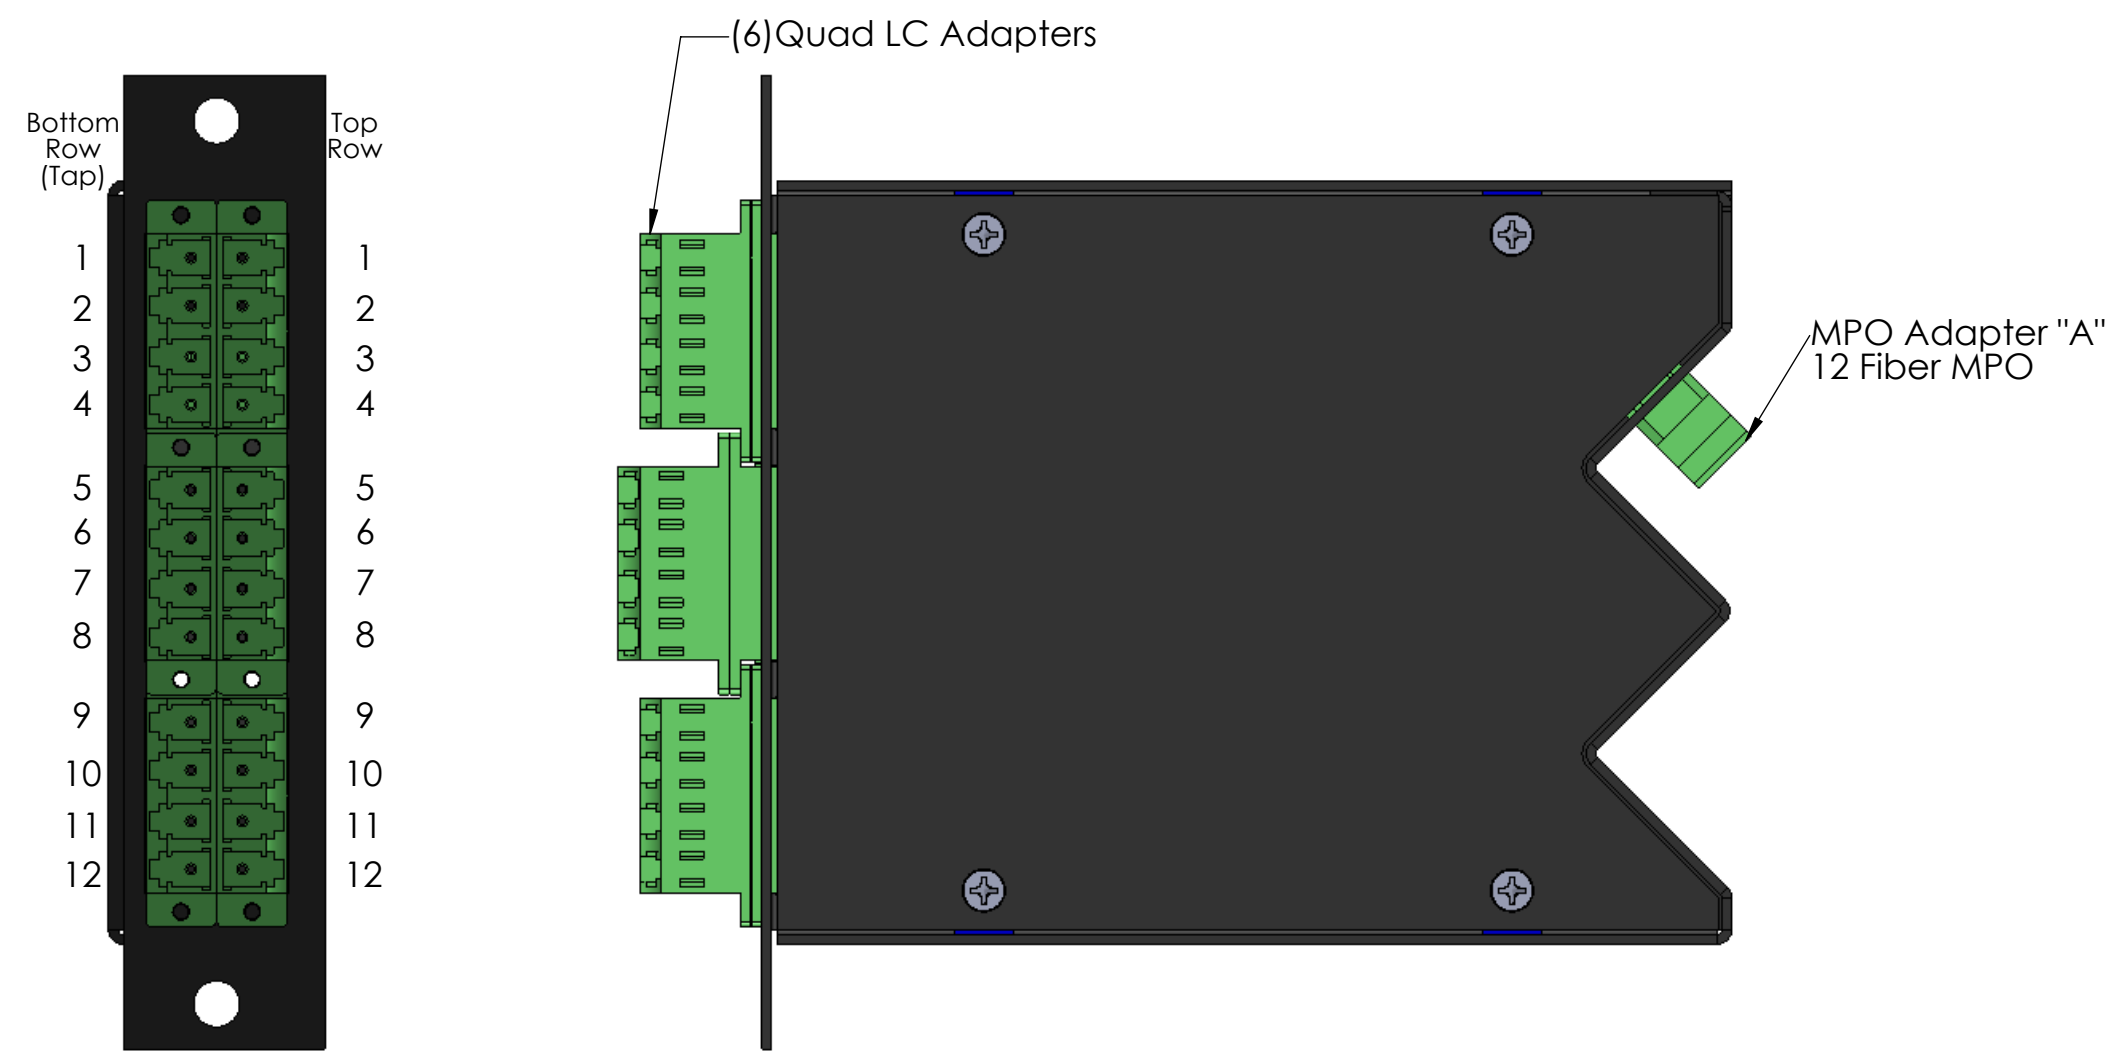

Fiberdyne Configuration 387					
MPO-LC, Breakout & Optical Tap, SM, LGX Cassette, OS2, 12 Pin 12 Fiber to 12 LC & 12 LC Tap Ports, Type A					
Fiber Color	Lane Assignment Connector A	Pin # Connector A	LC Position Top Row	LC Position Top Row	Fiber Color
Blue	TX1	1	1	RX1	Blue
Orange	RX1	2	2	TX1	Orange
Green	TX2	3	3	RX2	Green
Brown	RX2	4	4	TX2	Brown
Grey	TX3	5	5	RX3	Grey
White	RX3	6	6	TX3	White
Red	TX4	7	7	RX4	Red
Black	RX4	8	8	TX4	Black
Yellow	TX5	9	9	RX5	Yellow
Purple	RX5	10	10	TX5	Purple
Pink	TX6	11	11	RX6	Pink
Aqua	RX6	12	12	TX6	Aqua
			LC Tap Port Bottom Row	LC Tap Port Bottom Row	Fiber Color
			1	RX1 Tap	Blue
			2	TX1 Tap	Orange
			3	RX2 Tap	Green
			4	TX2 Tap	Brown
			5	RX3 Tap	Grey
			6	TX3 Tap	White
			7	RX4 Tap	Red
			8	TX4 Tap	Black
			9	RX5 Tap	Yellow
			10	TX5 Tap	Purple
			11	RX6 Tap	Pink
			12	TX6 Tap	Aqua

Fiberdyne Labs Inc. Frankfort, NY
www.fiberdyne.com

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF FIBERDYNE LABS INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF FIBERDYNE LABS INC IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME	DATE	FIBERDYNE LABS, INC TITLE: Configuration 387 MPO-LC, Breakout & Optical Tap, SM, LGX Cassette, OS2, 12 Pin 12 Fiber to 12 LC & 12 LC Tap Ports Type A
DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ± ANGULAR: MACH ± BEND ± TWO PLACE DECIMAL ±.005 THREE PLACE DECIMAL ±.01		DRAWN	CFO 03/24/14	
INTERPRET GEOMETRIC TOLERANCING PER:		CHECKED		
MATERIAL SEE NOTES		ENG APPR.		
FINISH SEE NOTES		MFG APPR.		SIZE DWG. NO. REV B 130-12131-001 A
NEXT ASSY	USED ON	Q.A.		
APPLICATION		COMMENTS:		SCALE: 1:1
DO NOT SCALE DRAWING		CAD FILE:		ECR: 14006-001
				SHEET 1 OF 1

8

7

6

5

4

3

2

1

8

7

6

5

4

3

2

1