

REV.	DESCRIPTION	DATE	APPROVED

D

D

C


C

B

B

A

A

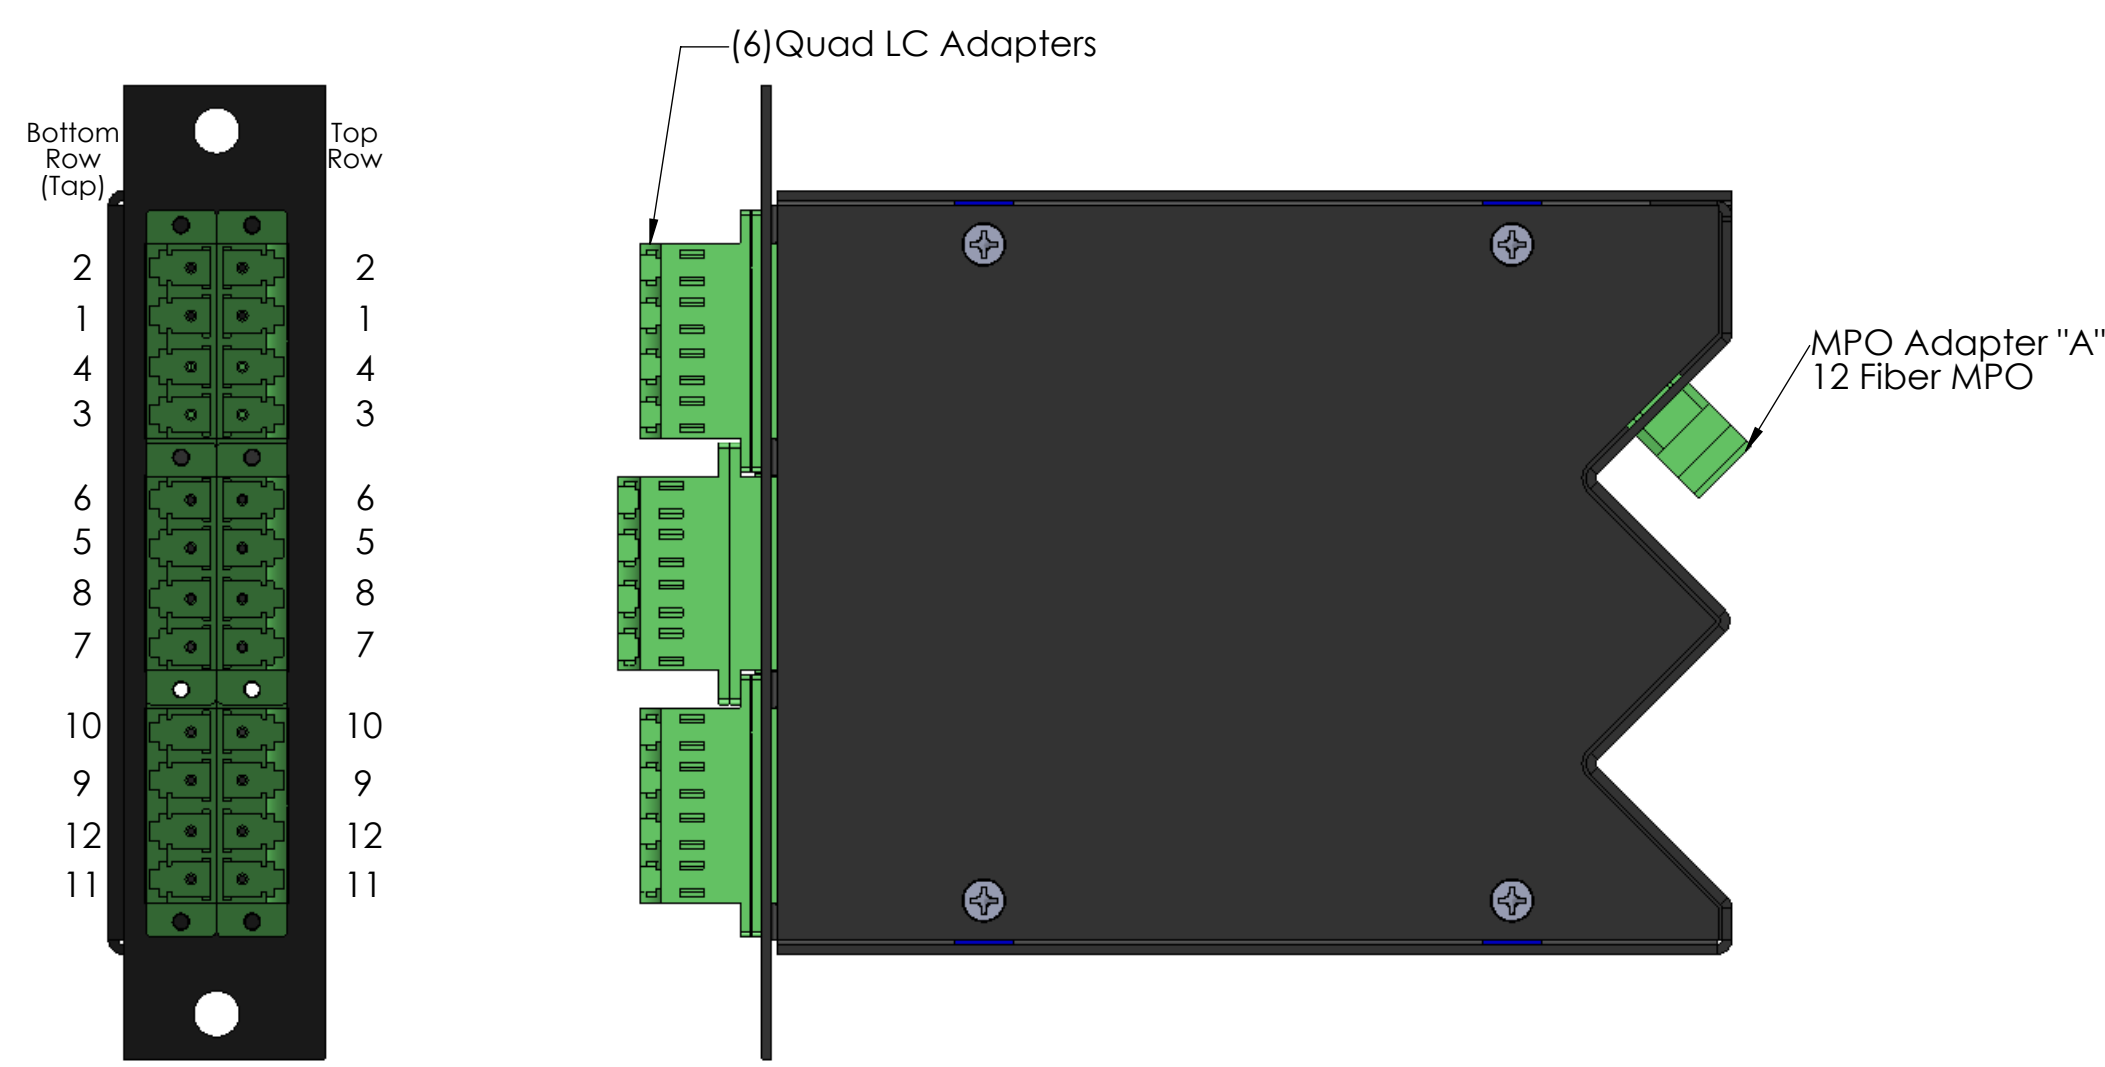

Fiberdyne Configuration 389					
MPO-LC, Breakout & Optical Tap, SM, LGX Cassette, OS2, 12 Pin 12 Fiber to 12 LC & 12 LC Tap Ports, Type C					
Fiber Color	Lane Assignment Connector A	Pin # Connector A	LC Position Top Row	LC Position Top Row	Fiber Color
Blue	TX1	1	2	RX1	Blue
Orange	RX1	2	1	TX1	Orange
Green	TX2	3	4	RX2	Green
Brown	RX2	4	3	TX2	Brown
Grey	TX3	5	6	RX3	Grey
White	RX3	6	5	TX3	White
Red	TX4	7	8	RX4	Red
Black	RX4	8	7	TX4	Black
Yellow	TX5	9	10	RX5	Yellow
Purple	RX5	10	9	TX5	Purple
Pink	TX6	11	12	RX6	Pink
Aqua	RX6	12	11	TX6	Aqua
			LC Tap Port Bottom Row	LC Tap Port Bottom Row	Fiber Color
			2	RX1 Tap	Blue
			1	TX1 Tap	Orange
			4	RX2 Tap	Green
			3	TX2 Tap	Brown
			6	RX3 Tap	Grey
			5	TX3 Tap	White
			8	RX4 Tap	Red
			7	TX4 Tap	Black
			10	RX5 Tap	Yellow
			9	TX5 Tap	Purple
			12	RX6 Tap	Pink
			11	TX6 Tap	Aqua

Fiberdyne Labs Inc. Frankfort, NY
www.fiberdyne.com

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF FIBERDYNE LABS INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF FIBERDYNE LABS INC IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME	DATE	FIBERDYNE LABS, INC TITLE: Configuration 389 MPO-LC, Breakout & Optical Tap, SM LGX Cassette, OS2, 12 Pin 12 Fiber to 12 LC & 12 LC Tap Ports Type C	
DIMENSIONS ARE IN INCHES		DRAWN	CFO		03/24/14
TOLERANCES:		CHECKED			
FRACTIONAL ±		ENG APPR.			
ANGULAR: MACH ± BEND ±		MFG APPR.			
TWO PLACE DECIMAL ±.005		Q.A.			
THREE PLACE DECIMAL ±.01		COMMENTS:			
INTERPRET GEOMETRIC TOLERANCING PER:		CAD FILE:			
MATERIAL				SIZE DWG. NO. REV	
SEE NOTES				B 130-12133-001 A	
FINISH				SCALE: 1:1 ECR: 14006-001 SHEET 1 OF 1	
SEE NOTES					
NEXT ASSY	USED ON				
APPLICATION					
DO NOT SCALE DRAWING					

8

7

6

5

4

3

2

1

8

7

6

5

4

3

2

1