


8 7 6 5 4 3 2 1

REV.	DESCRIPTION	DATE	APPROVED

D D

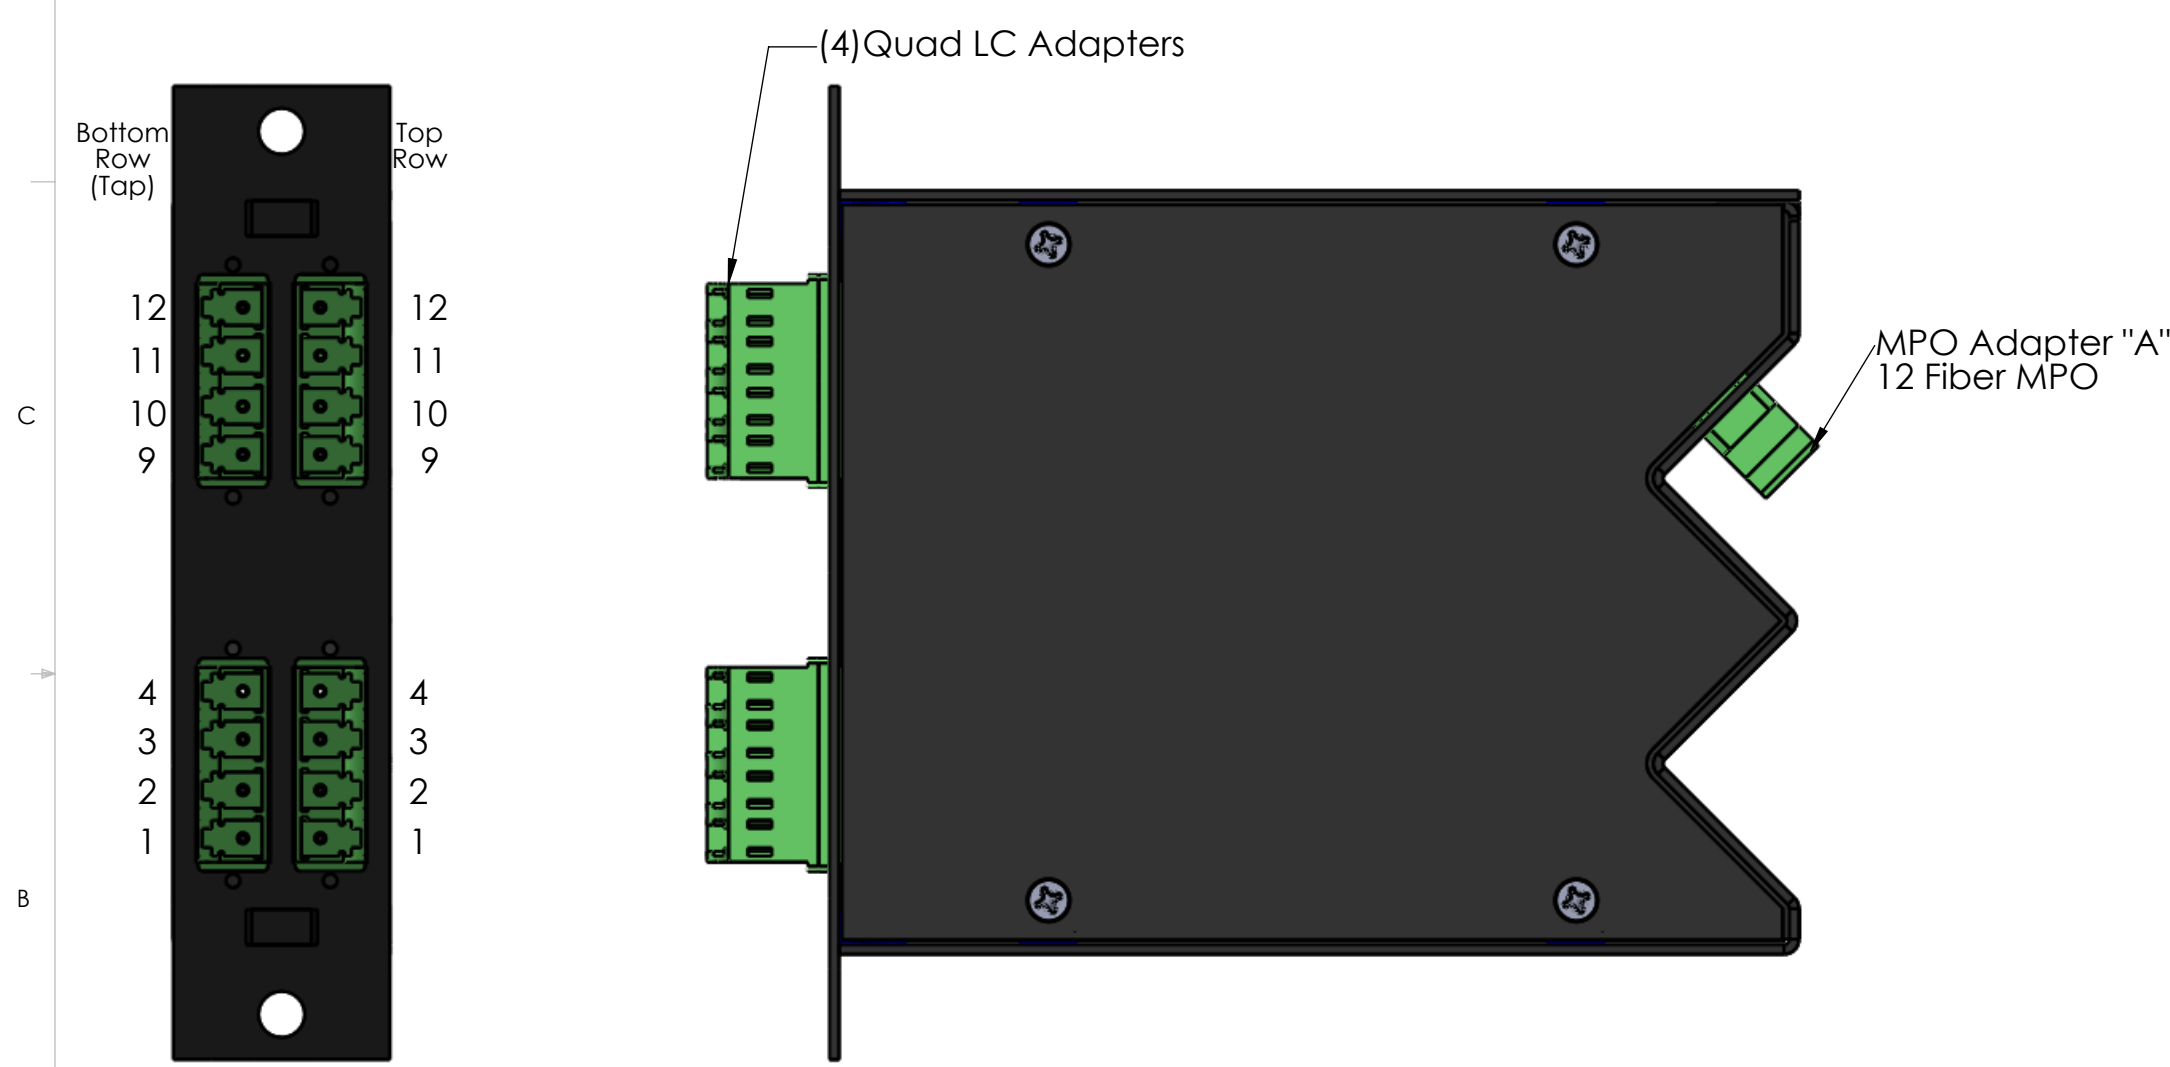

Fiberdyne Configuration 392					
MPO-LC, Breakout & Optical Tap, SM, LGX Cassette, OS2, 12 Pin 8 Fiber to 8 LC & 8 LC Tap Ports, Method B					
Fiber Color	Lane Assignment Connector A	Pin # Connector A	LC Position Top Row	LC Position Top Row	Fiber Color
Blue	TX1	12	12	RX1	Blue
Orange	RX1	11	11	TX1	Orange
Green	TX2	10	10	RX2	Green
Brown	RX2	9	9	TX2	Brown
Grey	Not Used	8	8	Not Used	Grey
White	Not Used	7	7	Not Used	White
Red	Not Used	6	6	Not Used	Red
Black	Not Used	5	5	Not Used	Black
Yellow	TX5	4	4	RX5	Yellow
Purple	RX5	3	3	TX5	Purple
Pink	TX6	2	2	RX6	Pink
Aqua	RX6	1	1	TX6	Aqua
			LC Tap Port Bottom Row	LC Tap Port Bottom Row	Fiber Color
			12	RX1 Tap	Blue
			11	TX1 Tap	Orange
			10	RX2 Tap	Green
			9	TX2 Tap	Brown
			8	Not Used	Grey
			7	Not Used	White
			6	Not Used	Red
			5	Not Used	Black
			4	RX5 Tap	Yellow
			3	TX5 Tap	Purple
			2	RX6 Tap	Pink
			1	TX6 Tap	Aqua

B B

A A

Fiberdyne Labs Inc. Frankfort, NY
www.fiberdyne.com

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF FIBERDYNE LABS INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF FIBERDYNE LABS INC IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME	DATE	FIBERDYNE LABS, INC TITLE: Configuration 392 MPO-LC, Breakout & Optical Tap, SM, LGX Cassette, OS2, 12 Pin 8 Fiber to 8 LC & 8 LC Tap Ports Method B	
DIMENSIONS ARE IN INCHES		DRAWN	CFO		03/25/14
TOLERANCES:		CHECKED			
FRACTIONAL ±		ENG APPR.			
ANGULAR: MACH ± BEND ±		MFG APPR.			
TWO PLACE DECIMAL ±.005		Q.A.			
THREE PLACE DECIMAL ±.01		COMMENTS:			
INTERPRET GEOMETRIC TOLERANCING PER:		CAD FILE:			
MATERIAL				SIZE DWG. NO. REV	
SEE NOTES				B 130-12136-001 A	
FINISH				SCALE: 1:1 ECR: 14006-001 SHEET 1 OF 1	
SEE NOTES					
NEXT ASSY	USED ON				
APPLICATION					
DO NOT SCALE DRAWING					

8 7 6 5 4 3 2 1