


# Fiberdyne Configuration 61

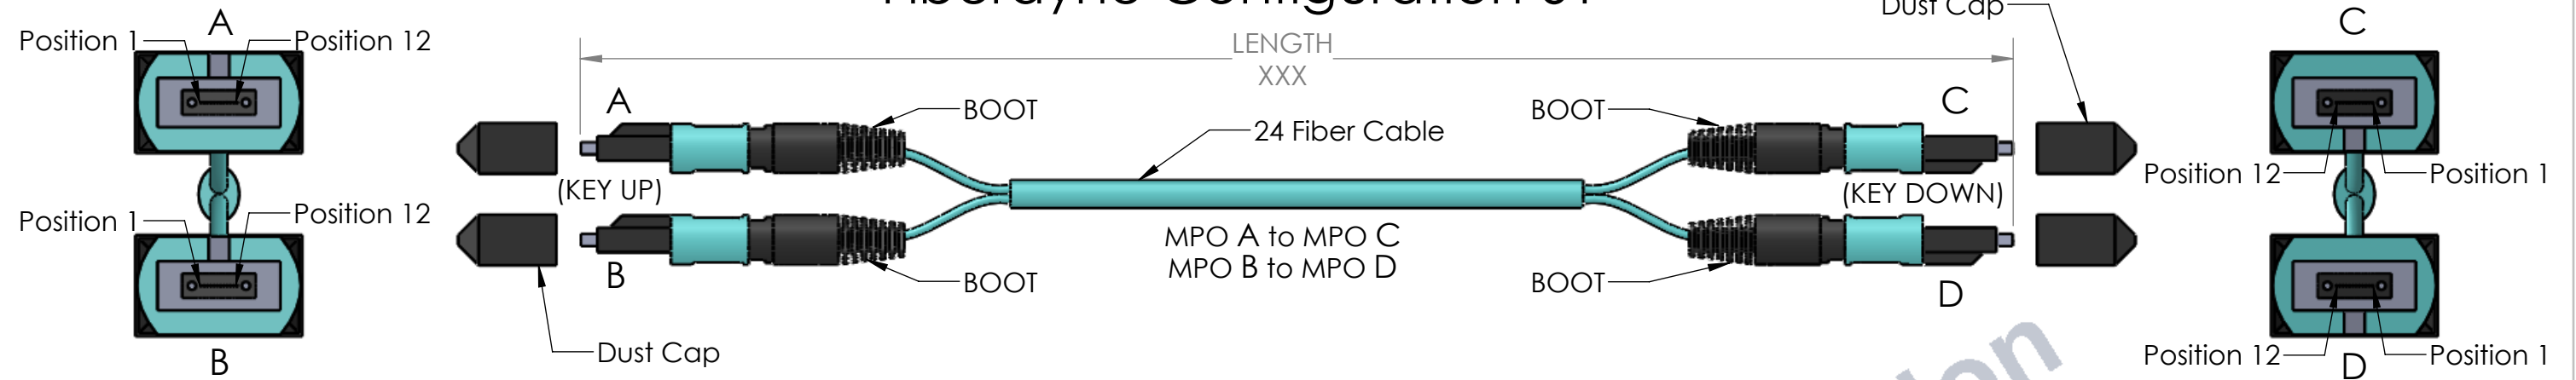

## 10Gb MPO Assemblies

Fiberdyne Part Number	Fiberdyne Configuration 61	Cable Type 50/125 OM3 (Max 100m)	Fiber Count	End A Connector	End B Connector	End C Connector	End D Connector	Guide Pin P=Pinned(Male) NP=Non-Pinned(Female)	Insertion Loss (IL) Standard / Low Loss*
FMT-061010-XXXM	10GBASE-SR	3mm Round Plenum OM3	24	MPO 1x12	MPO 1x12	MPO 1x12	MPO 1x12	NP-NP	<.75
FMT-061020-XXXM	10GBASE-SR	3mm Round Plenum OM3	24	MPO 1x12	MPO 1x12	MPO 1x12	MPO 1x12	NP-P	<.75
FMT-061030-XXXM	10GBASE-SR	3mm Round Plenum OM3	24	MPO 1x12	MPO 1x12	MPO 1x12	MPO 1x12	P-NP	<.75
FMT-061040-XXXM	10GBASE-SR	3mm Round Plenum OM3	24	MPO 1x12	MPO 1x12	MPO 1x12	MPO 1x12	P-P	<.75
FMT-061050-XXXM	10GBASE-SR	3mm Round Plenum OM3	24	MPO 1x12	MPO 1x12	MPO 1x12	MPO 1x12	NP-NP	<.35
FMT-061060-XXXM	10GBASE-SR	3mm Round Plenum OM3	24	MPO 1x12	MPO 1x12	MPO 1x12	MPO 1x12	NP-P	<.35
FMT-061070-XXXM	10GBASE-SR	3mm Round Plenum OM3	24	MPO 1x12	MPO 1x12	MPO 1x12	MPO 1x12	P-NP	<.35
FMT-061080-XXXM	10GBASE-SR	3mm Round Plenum OM3	24	MPO 1x12	MPO 1x12	MPO 1x12	MPO 1x12	P-P	<.35
Fiberdyne Part Number	Fiberdyne Configuration 61	Cable Type 50/125 OM4 (Max 150m)	Fiber Count	End A Connector	End B Connector	End C Connector	End D Connector	Guide Pin P=Pinned(Male) NP=Non-Pinned(Female)	Insertion Loss (IL) Standard / Low Loss*
FMT-061110-XXXM	10GBASE-SR	3mm Round Plenum OM4	24	MPO 1x12	MPO 1x12	MPO 1x12	MPO 1x12	NP-NP	<.75
FMT-061120-XXXM	10GBASE-SR	3mm Round Plenum OM4	24	MPO 1x12	MPO 1x12	MPO 1x12	MPO 1x12	NP-P	<.75
FMT-061130-XXXM	10GBASE-SR	3mm Round Plenum OM4	24	MPO 1x12	MPO 1x12	MPO 1x12	MPO 1x12	P-NP	<.75
FMT-061140-XXXM	10GBASE-SR	3mm Round Plenum OM4	24	MPO 1x12	MPO 1x12	MPO 1x12	MPO 1x12	P-P	<.75
FMT-061150-XXXM	10GBASE-SR	3mm Round Plenum OM4	24	MPO 1x12	MPO 1x12	MPO 1x12	MPO 1x12	NP-NP	<.35
FMT-061160-XXXM	10GBASE-SR	3mm Round Plenum OM4	24	MPO 1x12	MPO 1x12	MPO 1x12	MPO 1x12	NP-P	<.35
FMT-061170-XXXM	10GBASE-SR	3mm Round Plenum OM4	24	MPO 1x12	MPO 1x12	MPO 1x12	MPO 1x12	P-NP	<.35
FMT-061180-XXXM	10GBASE-SR	3mm Round Plenum OM4	24	MPO 1x12	MPO 1x12	MPO 1x12	MPO 1x12	P-P	<.35

\*Insertion Loss for Connector Only

## Fiberdyne Configuration 61

MPO-MPO, 10G, Trunk, Two 12 Pin 12 Fiber MPO to Two 12 Pin 12 Fiber MPO, Type C					
Fiber Color	Lane Assignment Connector A	Position # Connector A Left Side	Position # Connector C Right Side	Lane Assignment Connector C	Fiber Color
Blue	TX1	1	2	RX1	Blue
Orange	RX1	2	1	TX1	Orange
Green	TX2	3	4	RX2	Green
Brown	RX2	4	3	TX2	Brown
Grey	TX3	5	6	RX3	Grey
White	RX3	6	5	TX3	White
Red	TX4	7	8	RX4	Red
Black	RX4	8	7	TX4	Black
Yellow	TX5	9	10	RX5	Yellow
Purple	RX5	10	9	TX5	Purple
Pink	TX6	11	12	RX6	Pink
Aqua	RX6	12	11	TX6	Aqua
Fiber Color	Lane Assignment Connector B	Position # Connector B Left Side	Position # Connector D Right Side	Lane Assignment Connector D	Fiber Color
Blue	TX1	1	2	RX1	Blue
Orange	RX1	2	1	TX1	Orange
Green	TX2	3	4	RX2	Green
Brown	RX2	4	3	TX2	Brown
Grey	TX3	5	6	RX3	Grey
White	RX3	6	5	TX3	White
Red	TX4	7	8	RX4	Red
Black	RX4	8	7	TX4	Black
Yellow	TX5	9	10	RX5	Yellow
Purple	RX5	10	9	TX5	Purple
Pink	TX6	11	12	RX6	Pink
Aqua	RX6	12	11	TX6	Aqua

# RoHS

FIBERDYNE LABS INC.

TITLE: Fiberdyne Configuration 61  
MPO-MPO, 10G, Trunk, Two 12 Pin 12 Fiber to Two 12 Pin 12 Fiber  
Type C

SIZE DWG. NO. REV  
B 075-11786-001 A

SCALE: 1:1 ECR: 14006-001 SHEET 1 OF 1

Fiberdyne Labs Inc. Frankfort, NY  
www.fiberdyne.com

PROPRIETARY AND CONFIDENTIAL  
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Fiberdyne Labs Inc. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Fiberdyne Labs Inc IS PROHIBITED.