


Fiberdyne Labs Inc. offers bulk indoor fiber at significant savings. Singlemode Simplex Fiber Riser rated 2.0mm Jacket. In stock, available for immediate delivery.

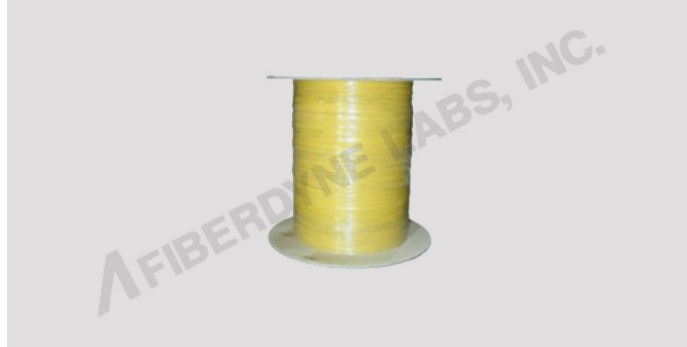

Cable Specifications:	
Fiber Core/Cladding	8.3/125 μm (Corning SMF-28e)
Characteristic	Singlemode (8.3/125 μm)
Crush Resistance	2000 N/cm
Impact Resistance	2000 Impacts with 1.6 N-m
Flexure	2000 Cycles minimum
Min Bend Radius (Long-term, No-load, Installed)	10X Cable Diameter
Min Bend Radius (Short-term, Loaded, Installed)	15X Cable Diameter
Operating Temperature	-20°C To +70°C
Storage Temperature	-40°C To +80°C

Part Number	Description	Price Per Meter
F9B11A2	Fiberdyne Singlemode Simplex Riser Rated, 2.0mm Jacket	Call to Order