


Fiberdyne Labs Inc. offers bulk indoor fiber at significant savings. Singlemode Bulk 6 Fiber Riser rated. In stock, available for immediate delivery.

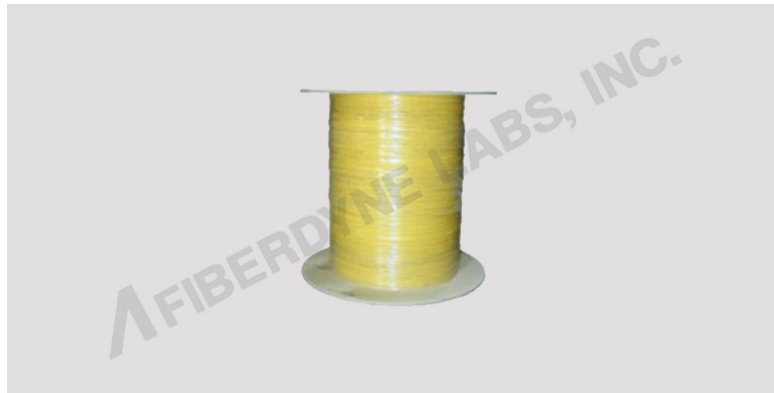

Cable Specifications:	Unit	Specifications
Fiber Core/Cladding	-	8.3/125 μ m (Corning SMF-28e)
Characteristic	-	Singlemode (8.3/125 μ m)
Crush Resistance	N/100m	1000 (Short term) 300 (Long term)
Tension, maximum	N	1500 (Short term) 300 (Long term)
Bend Radius, minimum, Long term, No-Load, Installed	-	10X Cable Diameter
Bend Radius, minimum Short term, Loaded, Installing	-	15X Cable Diameter
Operating Temperature	$^{\circ}$ C	-20 $^{\circ}$ To +70
Storage Temperature	$^{\circ}$ C	-40 To +80

Part Number	Description	Price Per Meter
F9B61A1	Fiberdyne 6 Fiber Singlemode Riser Rated	Call to Order

Custom Lengths Available