


**Corning 50/125 OM2 Multimode Duplex Riser 3.0mm Jacket**

**Custom Labeling Available**  
**Other Connector Combinations Available**  
**Boot Options:**

- - Short Boots
- - Bendable Boots
- - \*45° Boots
- - \*90° Boots
- - Uni-Boots available for LCs

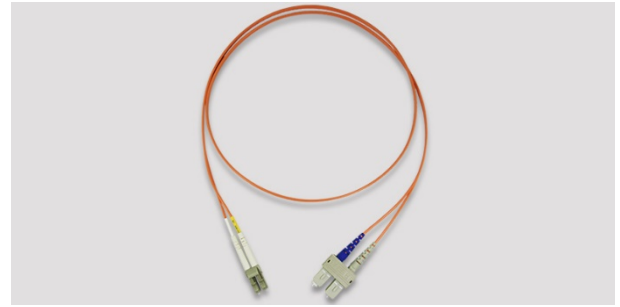

LC Clipped



SC Yoked

**LC & SC connectors available with or without duplex clips/yokes**  
**Plenum cable available upon request**

[2mm cables available](#)

**\*Not available on all boots**

Cable & Connector Specifications:	
Fiber Type	50/125 OM2 Multimode
Insertion Loss Per Connector	<0.4dB, Typical 0.25dB
Fiber Height	< 100nm
Repeatability	> 500 Cycles
Operating Temperature	-40°C To +75°C
Humidity Range	5% To 95% (Non-Condensing)
Strain Relief Boot Lengths	3cm to 5cm Available
Standard Compliance	Telcordia

Corning 50/125 OM2 Multimode Duplex Riser 2.0mm Jacket		
<b>LC-LC Duplex</b>	F1C21C1SCCXXX	Specify Length When Ordering
<b>LC-SC Duplex</b>	F1C21C1SCCYXXX	Specify Length When Ordering
<b>SC-SC Duplex</b>	F1C21C1SCYYXXX	Specify Length When Ordering
<b>SC-ST Duplex</b>	F1C21C1SCY1XXX	Specify Length When Ordering
<b>ST-ST Duplex</b>	F1C21C1SC11XXX	Specify Length When Ordering

**Other Connector Combinations available.**