


Fiberdyne Labs Inc. offers bulk indoor fiber at significant savings. Singlemode 24 Fiber Riser rated. In stock, available for immediate delivery.

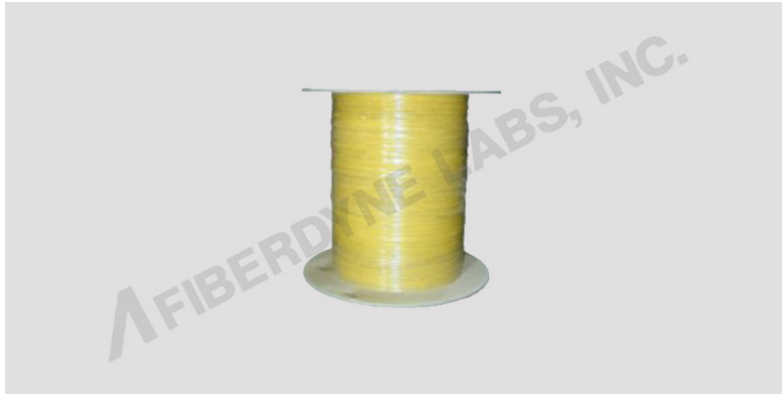

| Cable Specifications:                                  | Unit               | Specifications                          |
|--|--------------------|---|
| Fiber Core/Cladding                                    | -                  | 8.3/125 $\mu\text{m}$ (Corning SMF-28e) |
| Characteristic   | -                  | Singlemode (8.3/125 $\mu\text{m}$ )     |
| Crush Resistance                                       | N/100m             | 1000 (Short term)<br>300 (Long term)    |
| Tension, maximum                                       | N                  | 1500 (Short term)<br>300 (Long term)    |
| Bend Radius, minimum,<br>Long term, No-Load, Installed | -                  | 10X Cable Diameter                      |
| Bend Radius, minimum<br>Short term, Loaded, Installing | -                  | 15X Cable Diameter                      |
| Operating Temperature                                  | $^{\circ}\text{C}$ | -20 $^{\circ}$ To +70                   |
| Storage Temperature                                    | $^{\circ}\text{C}$ | -40 To +80                              |

| Part Number | Description                         |
|-------------|-------------------------------------|
| F9B91A1     | Fiberdyne 24 Fiber Singlemode Riser |

Custom Lengths Available