


# Fiberdyne Configuration 947

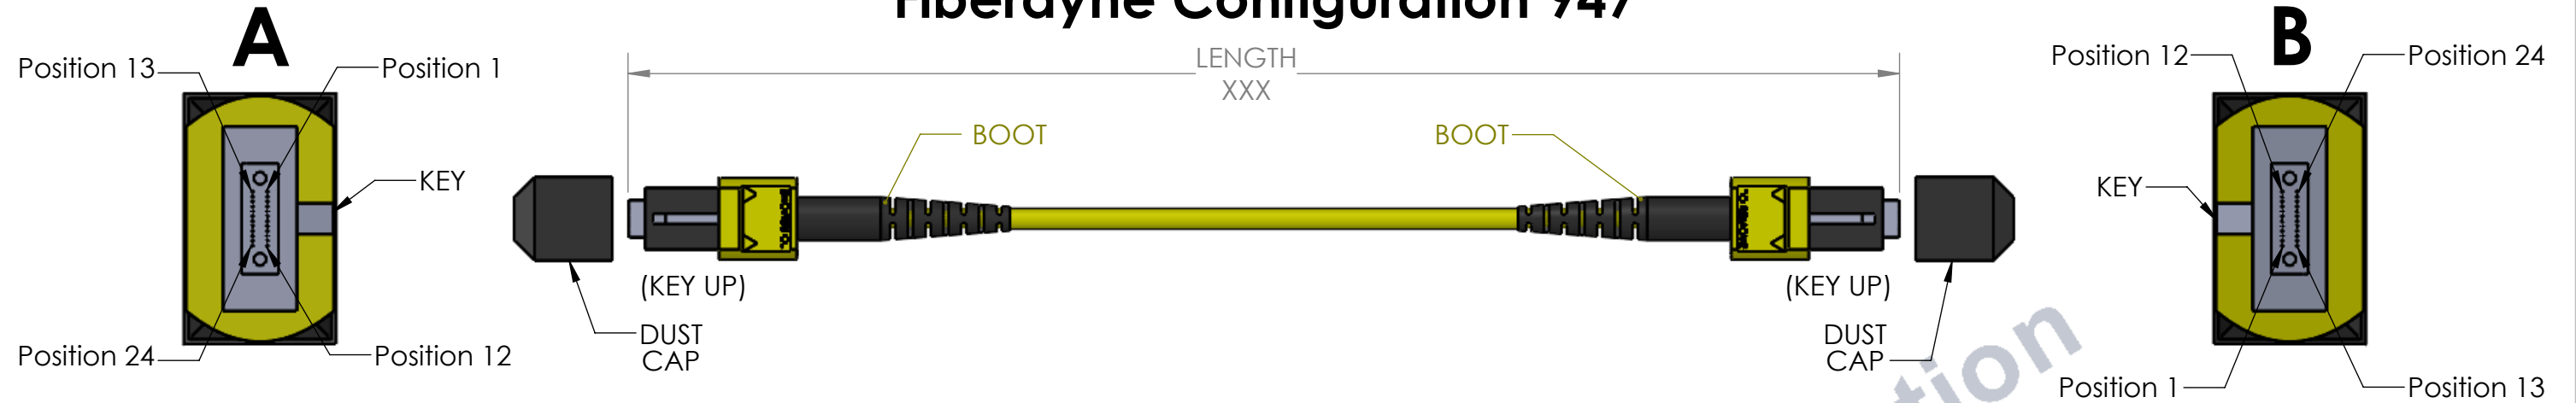

SM MPO Assemblies							
Fiberdyne Part Number	Cable Type ONFP	Fiber Type OS2	Fiber Count	End A Connector	End B Connector	Guide Pin P=Pinned(Male) NP=Non-Pinned(Female)	Insertion Loss (IL) Standard / Low Loss*
FMT-947010-XXXM	3mm Round	G.657.A2	24	MPO 1x24	MPO 1x24	NP-NP	<.75
FMT-947020-XXXM	3mm Round	G.657.A2	24	MPO 1x24	MPO 1x24	NP-P	<.75
FMT-947040-XXXM	3mm Round	G.657.A2	24	MPO 1x24	MPO 1x24	P-P	<.75
FMT-947050-XXXM	3mm Round	G.657.A2	24	MPO 1x24	MPO 1x24	NP-NP	<.35
FMT-947060-XXXM	3mm Round	G.657.A2	24	MPO 1x24	MPO 1x24	NP-P	<.35
FMT-947080-XXXM	3mm Round	G.657.A2	24	MPO 1x24	MPO 1x24	P-P	<.35

\*Insertion Loss for Connector Only

Configuration 947			
MPO-MPO, SM, 24 Position 24 Fiber to 24 Position 24 Fiber, Standard Boots, ANSI/TIA-568.3 Type B:2.2, Key Up/Key Up			
Fiber Color	Position # Connector A	Position # Connector B	Fiber Color
Blue	1	24	Blue
Orange	2	23	Orange
Green	3	22	Green
Brown	4	21	Brown
Grey	5	20	Grey
White	6	19	White
Red	7	18	Red
Black	8	17	Black
Yellow	9	16	Yellow
Purple	10	15	Purple
Pink	11	14	Pink
Aqua	12	13	Aqua
Fiber Color	Position # Connector A	Position # Connector B	Fiber Color
Blue	13	12	Blue
Orange	14	11	Orange
Green	15	10	Green
Brown	16	9	Brown
Grey	17	8	Grey
White	18	7	White
Red	19	6	Red
Black	20	5	Black
Yellow	21	4	Yellow
Purple	22	3	Purple
Pink	23	2	Pink
Aqua	24	1	Aqua

Note: Configured per ANSI/TIA-568.3 Type B:2-2

## RoHS

ZONE	REV.	DESCRIPTION	DATE	APPROVED
	-1	Original Publication	3/6/25	FMO
REVISIONS				

Fiberdyne Labs Inc. Frankfort, NY  
www.fiberdyne.com

**PROPRIETARY AND CONFIDENTIAL**

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Fiberdyne Labs Inc. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Fiberdyne Labs Inc IS PROHIBITED.

FIBERDYNE LABS INC.		
TITLE: Configuration 947 MPO-MPO SM, 24 Position 24 Fiber to 24 Position 24 Fiber, w/ Standard Boots, ANSI/TIA-568.3 Type B:2-2		
SIZE <b>B</b>	DWG. NO. 900_13498_001	REV -1
SCALE: 1:1		SHEET 1 OF 1